

Microphone Set

VM-10L Violin / Viola

VM-10C Cello

VM-10D Double Bass

CM-10E Erhu

User Guide

MIPRO Electronics Co., Ltd

Headquarters: No. 814, Beigang Rd., Chiayi City 60096, Taiwan
 Tel : +886.5.238.0809 Fax : +886.5.238.0803
 www.mipro.com.tw mipro@mipro.com.tw



MN 019/09
 All rights reserved.
 Do not copy or forward without prior approvals MIPRO.
 Specifications and design subject to change without notice.

Microphone Set

1. Violin / Viola VM-10L, Fig. 1:
 - (A) Put the MU-55V microphone and the VH-10L holder together, and then install it on the tailpiece of the violin / viola.
 - (B) Connect it with a VC-10L cable to the transmitter.

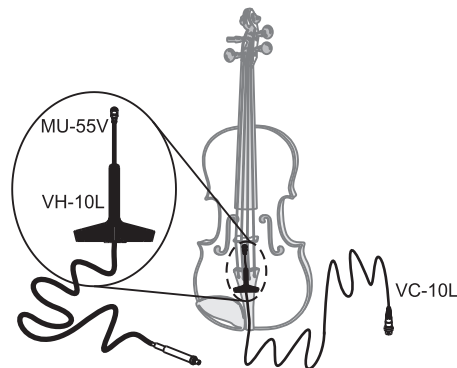


Fig. 1

Microphone Set

2. Cello VM-10C / Double Bass VM-10D:
 - (A) Assemble the microphone cable with the microphone holder, and install the holder on the bridge. Adjust the microphone to the ideal position.
 - (B) Connect the microphone cable to the transmitter.
 - (C) Installation tip for cello, Fig. 2.
 - (D) Installation tip for double bass, Fig. 3.

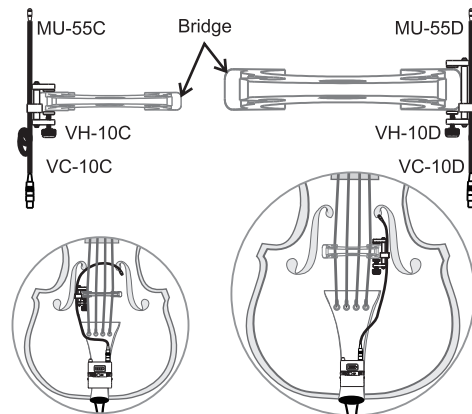


Fig. 2

Fig. 3

Note: Design and specifications are subject to change without prior notice. Refer to actual product in the event of product discrepancy.

Microphone Set

3. Erhu CM-10E:
 - (A) Assemble the microphone with the holder, Fig. 4-1.
 - (B) Connect CG-10E microphone cable to the microphone, Fig. 4-2.
 - (C) Install the microphone holder on the Erhu and connect CG-10E to the transmitter, Fig. 4-3.

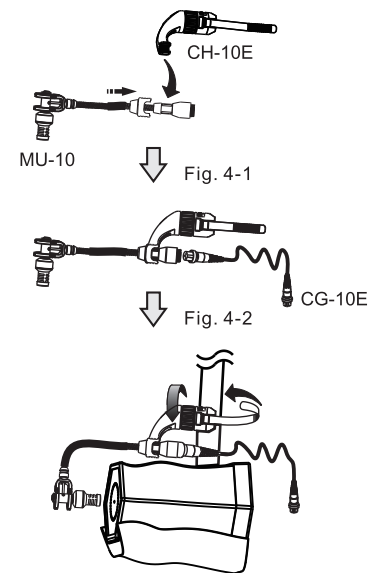


Fig. 4-3